


技术参数

声光介质
 声波模式
 声速
 波长
 输入偏振
 输出偏振
 插入损耗
 中心频率
 射频带宽
 射频驱动功率
 通光孔径
 平均衍射效率^(note 2)
 带宽内衍射效率平坦度
 最小衍射效率
 峰谷值@633 nm
 RMS at 633 nm
 驻波比
 扫描角
 时间带宽积

TeO₂
 Longitudinal
 4.20 mm/μs
 1.1 μm
 Horizontal
 Horizontal
 <2%
 130 MHz
 50 MHz
 3.5 W
 .8 mm Diameter
 N/A%
 N/A%
 >70%
 N/A
 2.0:1
 N/A
 N/A

外观尺寸图

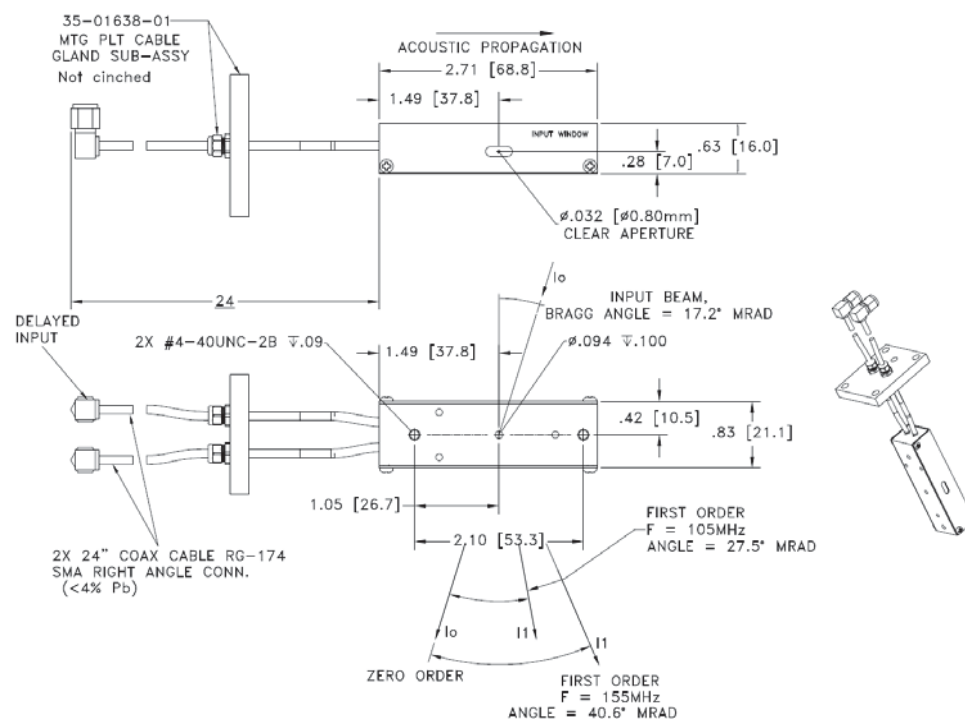

Notes:

1. Input impedance is 50 Ohms.
2. Electrode: Two element, phased, array.
3. RF impedance <2.0:1 over 95-165MHz (70MHz bandwidth)



Document

06/06/18

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 5/24/2018		DESCRIPTION: AODF 4130 1100nm	
MATERIAL:	CHK				
FINISH:	APP				
	APP		PART NUMBER:	97-03155-02	REV: 2
			SHEET 1 OF 1		