


技术参数

声光介质	TeO ₂
声波模式	Shear, Off-Axis
声速	660 m/sec ± 1%
波长	633-1064 nm
输入偏振	Linear, Vertical
输出偏振	Linear, Horizontal
插入损耗	< 3%
中心频率	40 MHz
射频带宽	1 MHz
射频驱动功率	< 0.8 w
通光孔径	2 x 6 mm
平均衍射效率	N/A
带宽内衍射效率平坦度	N/A
最小衍射效率	85%
峰值@633 mm	
RMS at 633 mm	
驻波比	<2.0:1
扫描角	N/A
时间带宽积	N/A

外观尺寸图

Document 01/25/17 Control

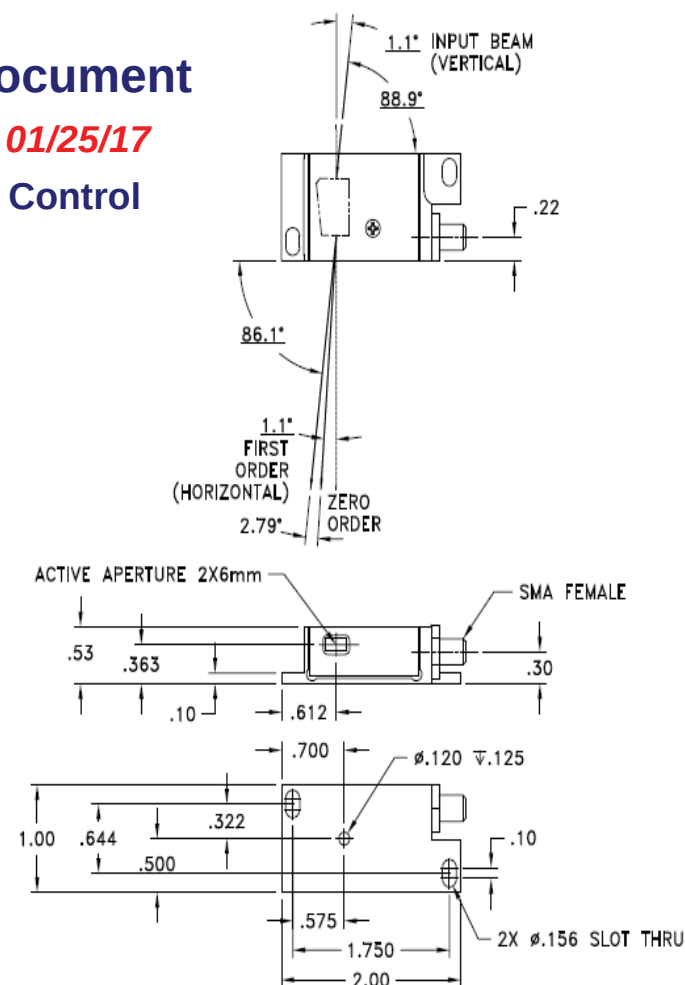

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX .XXX	DR	Geri Scholz 1/24/2017	Gooch & Housego		
MATERIAL:	CHK		DESCRIPTION: AODF 4040-190		
FINISH: 	APP		PART NUMBER:	REV:	SHEET 1 OF 1
	APP		97-03099-01	A	