


外观尺寸图

声光介质
 声波模式
 声速
 波长
 输入偏振
 输出偏振
 插入损耗
 中心频率
 射频带宽
 射频驱动功率
 通光孔径
 平均衍射效率
 带宽内衍射效率平坦度
 最小衍射效率
 峰值@633 mm
 RMS at 633 mm
 驻波比
 扫描角
 时间带宽积

TeO2
Shear, Off- Axis
657 M/sec
780 nm
Linear, Horizontal
Linear, Vertical
< 5%
40 MHz
1 MHz
<.2W
5x10mm
N/A
N/A
50%
<1.3:1
N/A
N/A

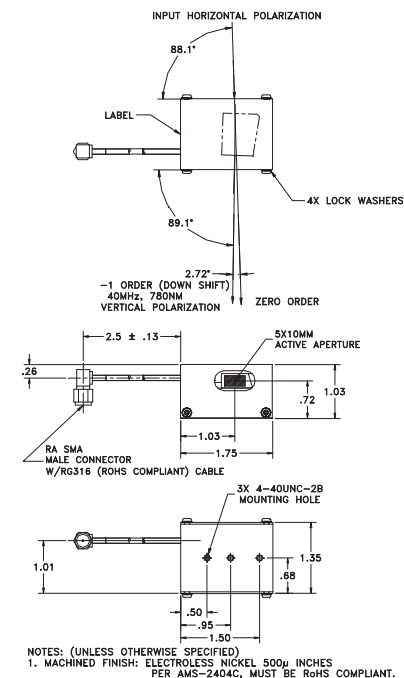

1. MACHINED FINISH: ELECTROLESS NICKEL 500μ INCHES PER AMS-2404C, MUST BE RoHS COMPLIANT.

2. MECHANICAL OUTLINE 97-03304-01-15.



Document

09/04/15

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: _XX _XXX	DR	Gerl Scholz 9/2/2015			
MATERIAL: 	CHK		DESCRIPTION: AODF 4040-192 ROHS		
	APP				
FINISH:	APP		PART NUMBER: 97-03304-01	REV: 3	SHEET 1 OF 1