

技术参数

外观尺寸图

Document

11/05/19

Control

声光介质

声波模式

声速

波长

输入偏振

输出偏振

插入损耗

中心频率

射频带宽

射频驱动功率

通光孔径

平均衍射效率

带宽内衍射效率平坦度

最小衍射效率

峰值@633 nm

RMS at 633 nm

驻波比

扫描角

时间带宽积

TeO₂

Shear, Off-Axis

660 m/sec ± 1%

460-690 nm

Linear, Vertical

Linear, Horizontal

< 3%

40 MHz

1 MHz

< 0.1W@460nm

2 x 6 mm

N/A


N/A

85%

<2.0:1

N/A

N/A

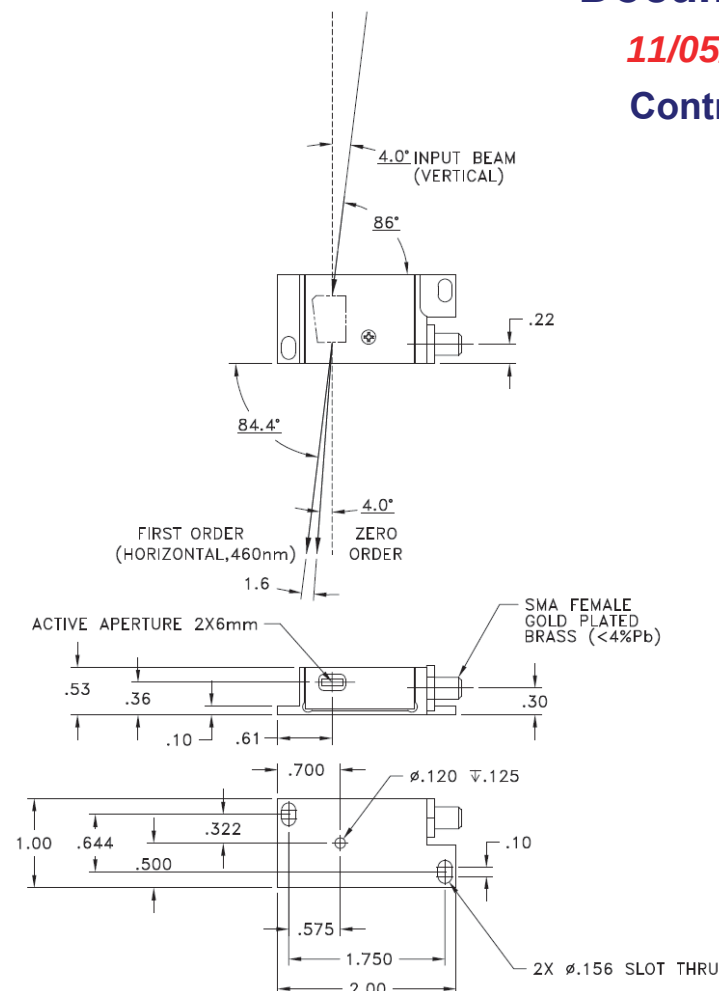

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX .XXX	DR	Geri Scholz 10/31/2019	Gooch & Housego		
MATERIAL:	CHK		DESCRIPTION: AODF 4040		
FINISH: 	APP		PART NUMBER:	REV:	SHEET 1 OF 1
	APP		97-03461-01	1	