


技术参数

声光介质	TeO ₂
声波模式	Longitudinal
声速	4.20 mm/μs
波长	1066-1100 nm
输入偏振	Linear
输出偏振	
插入损耗	<3%
中心频率	75 MHz
射频带宽	32MHz, Goal 40MHz
射频驱动功率	4W max.
通光孔径	2.5 mm dia.
平均衍射效率	N/A
带宽内光强变化	N/A
最小衍射效率	70%
峰谷值@633 nm	N/A
RMS at 633 nm	N/A
驻波比	2.0:1
扫描角	N/A
时间带宽积	N/A

外观尺寸图

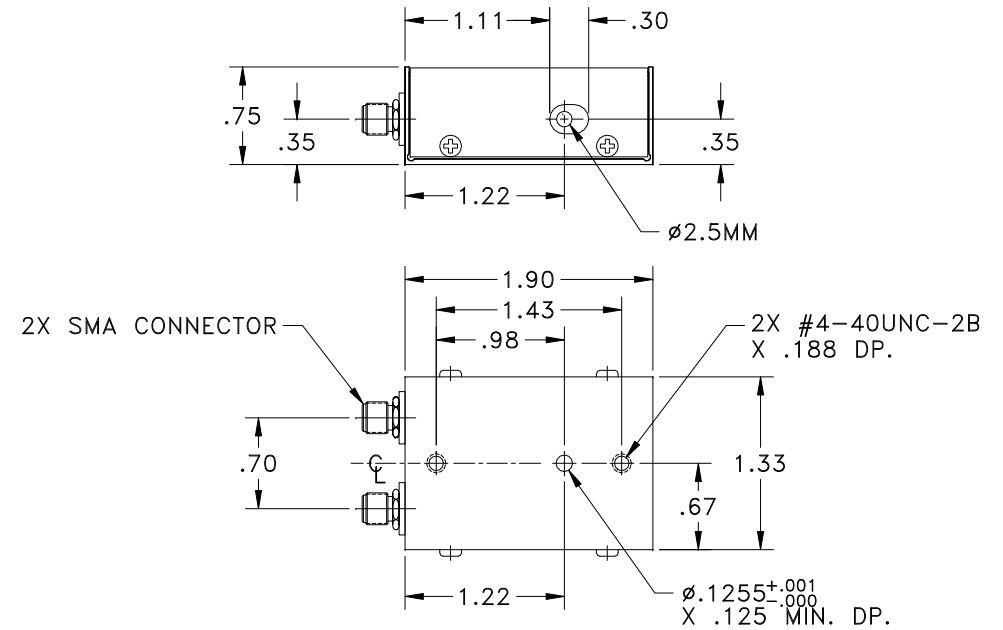

Notes:

1. Input Impedance is 50 Ohms.
2. Electrode: Two Element Phased Array
3. RoHS Compliant



Document

09/13/13

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 9/3/2013	Gooch & Housego		
MATERIAL:	CHK		DESCRIPTION: AODF 4075-2		
FINISH: 	APP		PART NUMBER:	REV:	SHEET 1 OF 1
	APP		97-02823-52	C	