


技术参数

声光介质
 声波模式
 声速
 波长
 输入偏振
 输出偏振
 插入损耗
 中心频率
 射频带宽
 射频驱动功率
 通光孔径
 带宽均匀性
 最小衍射效率
 驻波比 (55-110MHz)
 扫描角

TeO₂
 Shear, off axis
 .705 mm/μs
 750-1064 nm
 Horizontal
 Vertical
 3%
 See notes
 See notes
 6W nominal
 15mm Diameter
 -2db
 70%, Goal
 2.5:1
 See notes

外观尺寸图

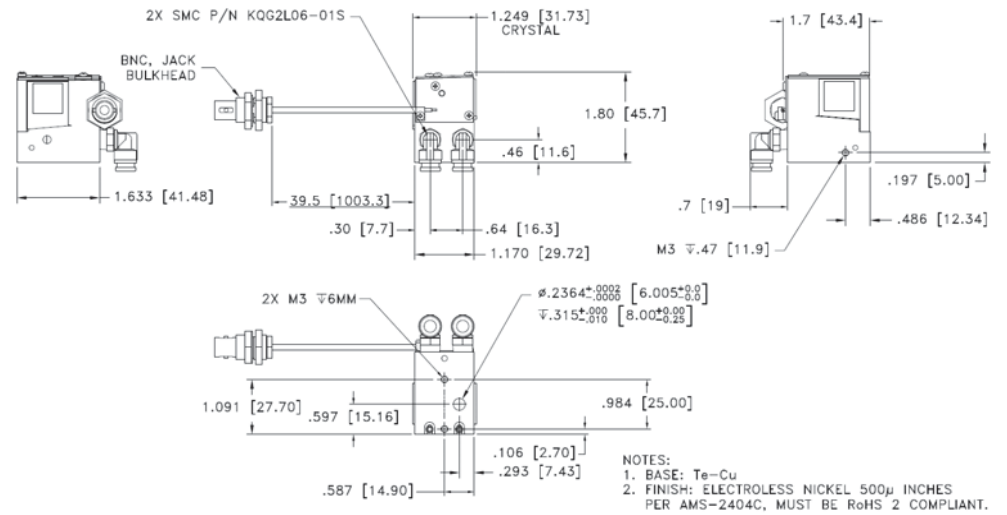

Notes:

Wavelength(nm)	Freq. Range(MHz)	Scan angle(mrad)
750	70-110	42.5
850	64-104	48.2
900	58-98	51.1
1064	55-85	45.3



Document
10/19/18
Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 10/19/2018		
MATERIAL:	CHK			
FINISH:	APP		AODF 4085 0.75-1.06um, "X axis"	
	APP			
		PART NUMBER:	97-03359-03	REV: 2
		SHEET 1 OF 1		