


外观尺寸图

声光介质
 声波模式
 声速
 波长
 输入偏振
 输出偏振
 插入损耗
 中心频率
 射频带宽
 射频驱动功率
 通光孔径
 带宽均匀性
 最小衍射效率
 驻波比 (55-110MHz)
 扫描角

TeO2
Shear, off axis
.705 mm/ μ s
750-1064 nm
Horizontal
Vertical
3%
See notes
See notes
6W nominal
15mm Diameter
-2db
70%, Goal
2.5:1
See notes

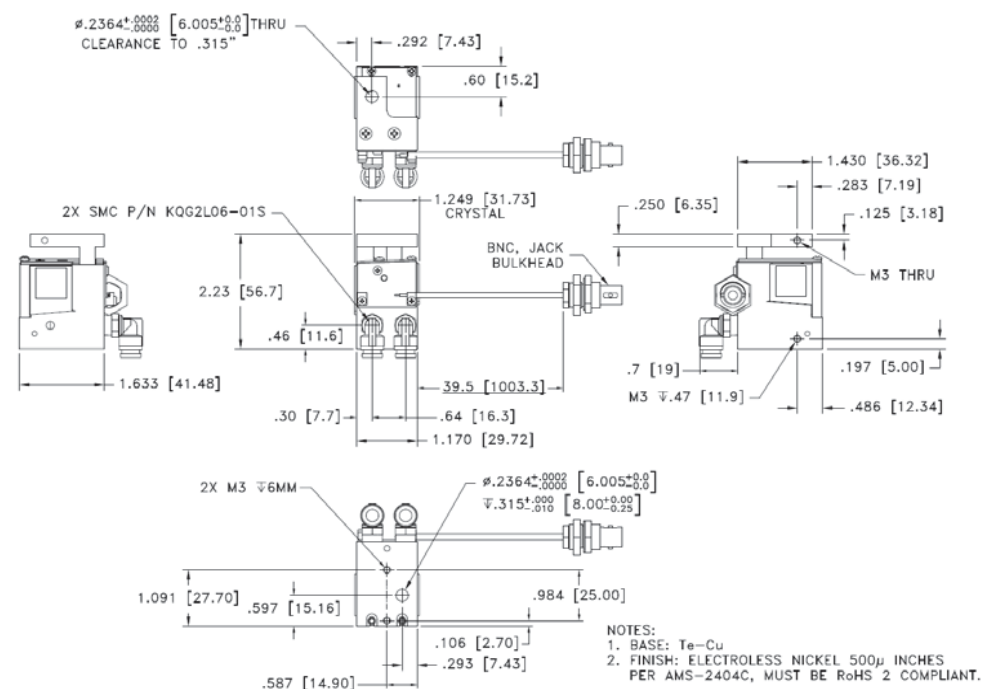

新特光电
Sintec Optoelectronics

Document
10/19/18
Control

Wavelength(nm)	Freq. Range(MHz)	Scan angle(mrad)
750	70-110	42.5
850	64-104	48.2
900	58-98	51.1
1064	55-85	45.3

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: ..XX ± .01 ...XXX ± .005	DR	Gerl Scholz 10/10/2018			
MATERIAL:	CHK		DESCRIPTION: AODF 4085 .75-1.06um, "Y axis"		
FINISH:	APP		PART NUMBER: 97-03359-04		
	APP				
			REV:	2	SHEET 1 OF 1