


技术参数

声光介质
 声波模式
 声速
 波长
 输入偏振
 输出偏振
 插入损耗
 中心频率
 射频带宽
 射频驱动功率
 通光孔径
 平均衍射效率
 带宽内衍射效率平坦度
 最小衍射效率
 峰值@633 nm
 RMS at 633 nm
 驻波比
 扫描角
 时间带宽积

Crystal Quartz
 Longitudinal
 5.74mm/μs
 532nm
 90° to Mounting Plane
 90° to Mounting Plane
 1%
 110MHz
 10 MHz
 <25W
 6 mm dia.
 80%
 .1
 N/A
 2:1
 .93 mrad@532nm
 N/A

外观尺寸图

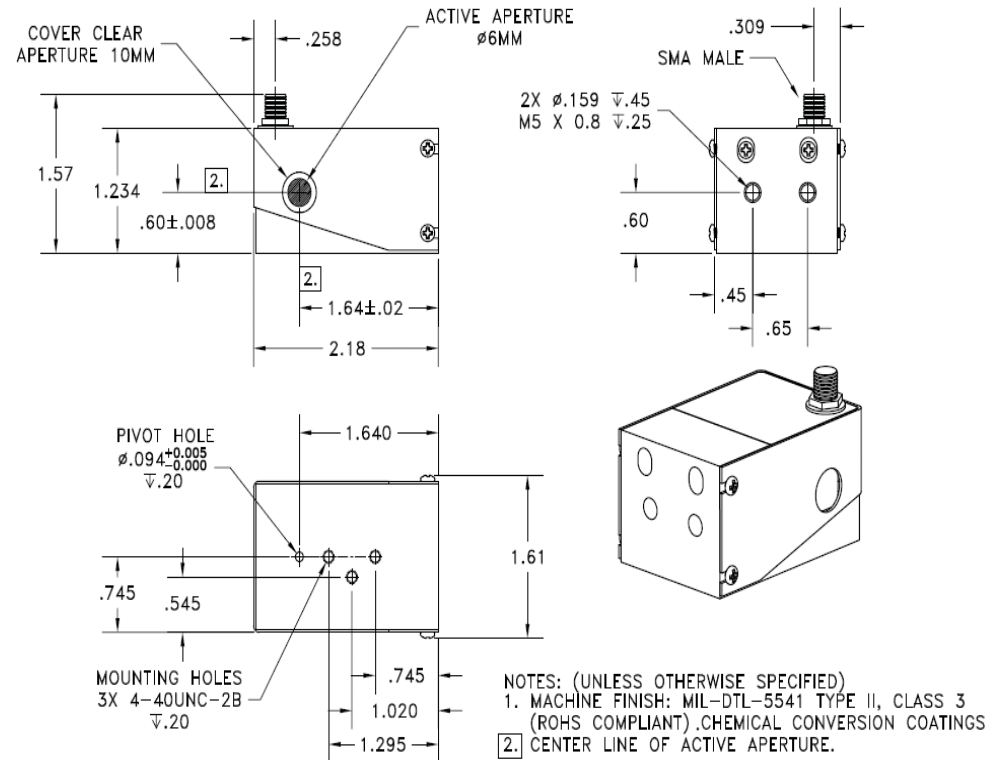

Notes:

1. Input Impedance 50 Ohms.
2. Unit to be water cooled .1 GPM <30C. Water channels Metalast plated Aluminum.
3. Mechanical Outline per 97-03292-01-15.
4. Optical window wedge <1'.



Document

03/10/16

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	T. Ng 2/29/2016	Gooch & Housego	
MATERIAL:	CHK		DESCRIPTION: AODF 4110 Quartz 532nm 6mm Aperture	
FINISH:	APP		PART NUMBER:	REV:
	APP		97-03292-01	2
				SHEET 1 OF 1