


技术参数

声光介质	TeO2
声波模式	Shear, off axis
声速	.65 mm/ μ s
波长	413 nm
输入偏振	Horizontal
输出偏振	Vertical
插入损耗	3%
中心频率	120 MHz
射频带宽	50 MHz
射频驱动功率	<1W
通光孔径	10mm Diameter
平均衍射效率	N/A
带宽内衍射效率平坦度	N/A
最小衍射效率	75%
峰谷值@633 nm	$\lambda/4$
RMS at 633 nm	N/A
驻波比	2.2:1
扫描角	N/A
时间带宽积	N/A

外观尺寸图

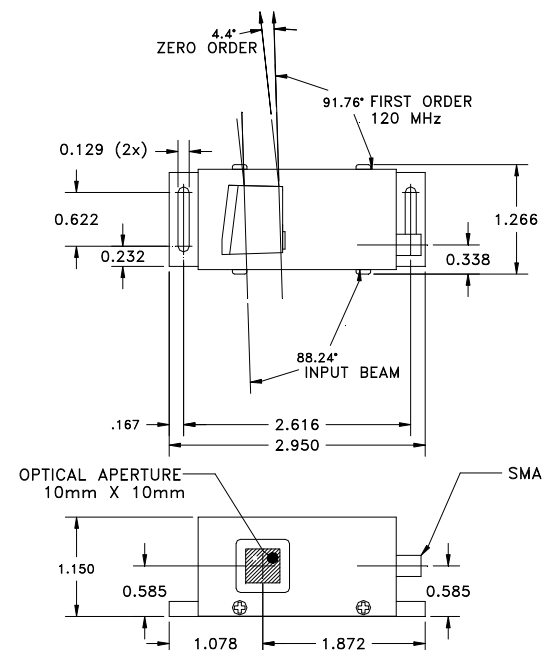

Notes:

1. First order @ 120MHZ collinear to input +/- 45'
2. Impedance matching frequency range 80-145MHz



Document

09/13/13

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	T. Ng 9/3/2013	Gooch & Housego	
MATERIAL:	CHK		DESCRIPTION: AODF 4120-2 10mm Aper., 413nm	
FINISH:	APP		PART NUMBER:	REV:
	APP		97-02799-01	B
				SHEET 1 OF 1