


DATA SHEET

S4LFT4068-199

telecentric F-Theta
UV fused silica
266 nm



outline drawing

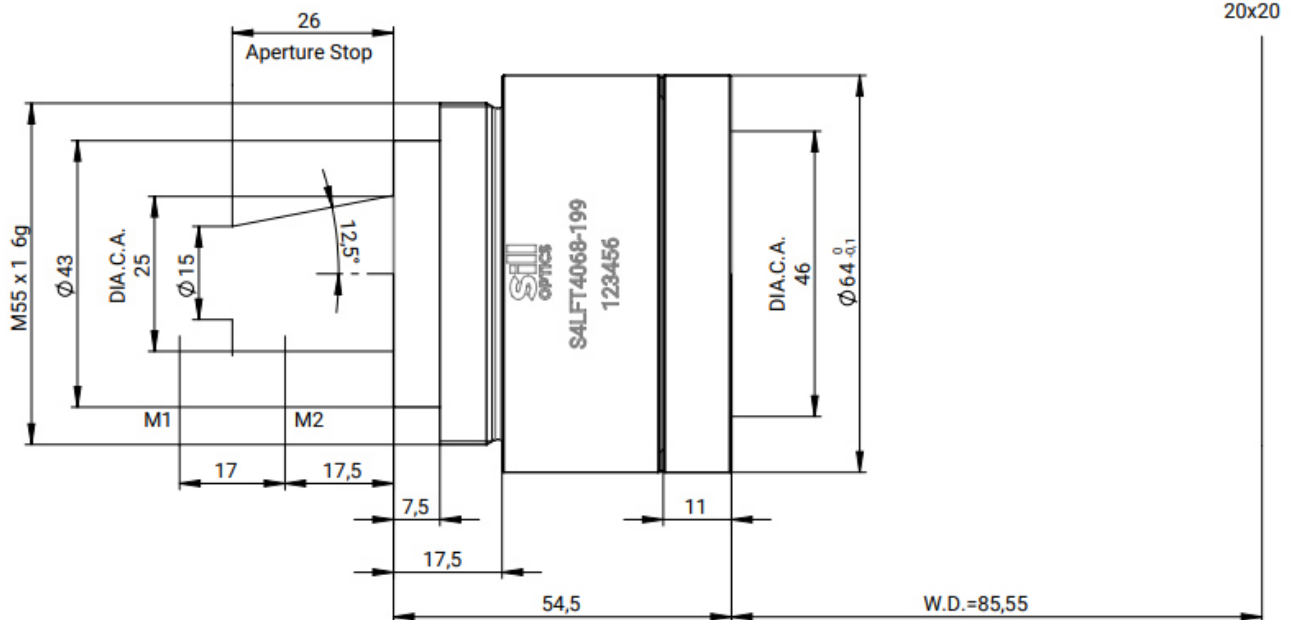


DATA SHEET

specifications

article number	S4LFT4068-199
design wavelength [nm]	266
effective focal length [mm]	65.5
working distance [mm]	85.6
max. entrance beam-Ø [mm]	14.0
aperture stop distance [mm]	26.0
scan area for a 2 mirror system with mirror distance from lens housing for mirror 2 / mirror 1 [mm x mm]	20 x 20 17.5 / 34.5
max. telecentricity error [°]	1.3
total transmission [%]	> 97
absorption [ppm]	not specified
lens material	UV fused silica
LIDT (coating)	0.5 J/cm² per 1ns pulse at 50Hz
SP and USP usable	yes
weight [kg]	0.7
cover glass	S4LPG4068-199
cleanliness	not specified

spot for 15x15 mm²

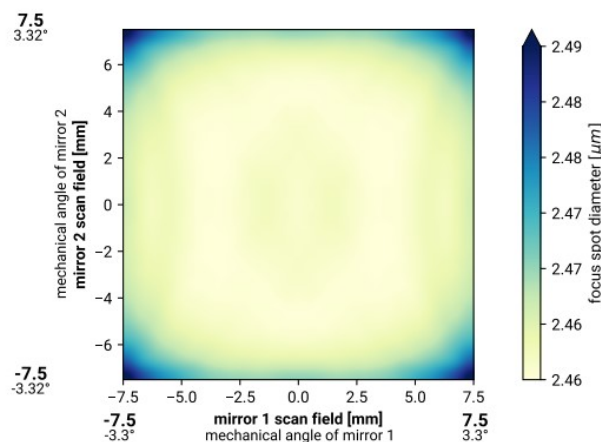


spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 10.0 mm diameter at $1/e^2$, clipped at 14.0 mm field size and mirror distances as given above for a two mirror scan system

back reflection positions

back reflections [mm] for 266 nm	
25.5	
0.3	
0.1	
1.5	

spot for 20x20 mm²

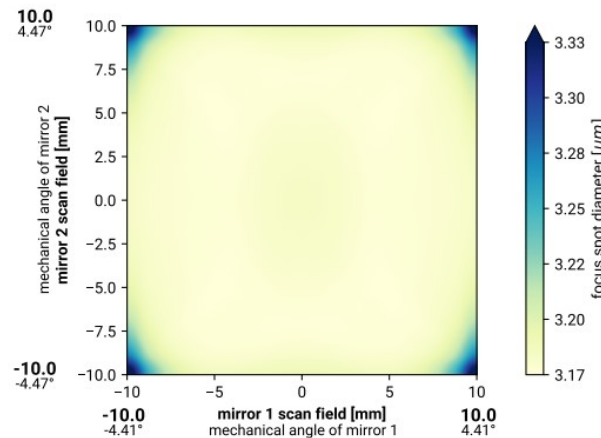

spot diameter at 86.5 % level for a Gaussian beam ($M^2 = 1$) with 7.0 mm diameter at $1/e^2$, clipped at 14.0 mm field size and mirror distances as given above for a two mirror scan system

remarks

The stated values are based on a vignetting of less than 1 %.

Effective focal length and working distance have a tolerance of +/- 1.5 %.

Absorption tolerance +/- 25 %. Absorption may increase. Correct cleaning establishes original condition.

新特光电是 Sill Optics 在中国及东南亚地区的官方授权合作伙伴。

您可通过 Sill Optics 官网查阅授权资质: <https://www.silloptics.de/unternehmen/vertriebspartner>, 新特光电持有 Sill Optics 官方出具的正式授权证书, 如有必要欢迎联系我司市场销售人员查阅。我们一站式提供 Sill Optics 各类光学元件的选型、方案设计及集成支持, 覆盖全生命周期服务, 满足科研与工业客户需求。更多信息请访问: www.SintecLaser.com

获取最新方案及报价, 请手机/微信联系: 罗经理: 18162698939, 程经理: 18162698959, 夏经理: 13697356016