

新特光电
Sintec Optics

A black, cylindrical optical component, likely a lens or filter, with a blue-tinted front element. It features a scale with markings from 0 to 2 and a label 'S6EXE96 08-292'.


[illegible]

DATA SHEET


SPECIFICATIONS

article number	S6EXP0008-292
design wavelength [nm]	532
magnification factor	0.8
divergence adjustable	yes
optical principle	Galilei (no internal focus)
pointing stability [mrad]	< 1
clear input aperture [mm]	14.0
clear output aperture [mm]	20.0
recommended beam-Ø [mm] ¹⁾	6.0
total number of lenses	2
total transmission [%]	> 99
lens material	fused silica
LIDT (coating) [J/cm²]	2.5 J/cm² per 1ns pulse at 50Hz
SP and USP usable	yes
SP and USP usable, reversed usage	no
mounting thread	M30x1
weight [kg]	0.3
accessory	S6MEC0107 - adapter M30x1 to C-mount

DIVERGENCE ADJUSTMENT

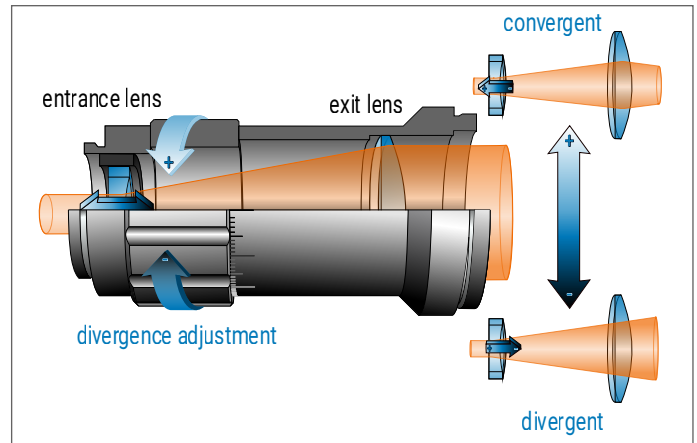

MOUNTING POSITIONS

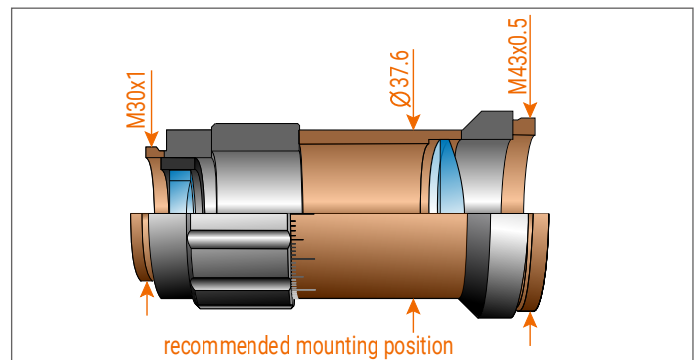

REMARKS

¹⁾clipped at $1/e^2$; wavefront error on axis (PV) < $\lambda/10$ (value provided by design)

magnification (reversed mode) = $1 / \text{magnification (regular mode)}$

divergence adjustment = 0 → collimated input beam results in collimated output beam

maximum divergence adjustment is ± 3 mm

RoHS compliant

length at divergence setting „0“ stated in the drawing - length extension of max. 3 mm is possible

BACK REFLECTION POSITION

back reflections [mm]	
0.0	
back reflections reverse [mm]	
9.00	
0.00	
0.00	

新特光电是 Sill Optics 在中国及东南亚地区的官方授权合作伙伴。

您可通过 Sill Optics 官网查阅授权资质: <https://www.silloptics.de/unternehmen/vertriebspartner>, 新特光电持有 Sill Optics 官方出具的正式授权证书, 如有必要欢迎联系我司市场销售人员查阅。我们一站式提供 Sill Optics 各类光学元件的选型、方案设计及集成支持, 覆盖全生命周期服务, 满足科研与工业客户需求。更多信息请访问: www.SintecLaser.com

获取最新方案及报价, 请手机/微信联系: 罗经理: 18162698939, 程经理: 18162698959, 夏经理: 13697356016